



mounting  
systems



## Light-S ProLine

<b>Application</b>	Flat roofs
<b>Roofing</b>	For all roof coverings (also gravel)
<b>Roof inclination</b>	Up to 5°
<b>Building height</b>	Max. 25m depending on wind loads on site
<b>Module width</b>	900 - 1060 mm (wider modules on request)
<b>Module length</b>	Up to 2000 mm (longer modules on request)
<b>Module inclination</b>	10° or 15°
<b>Supporting profiles</b>	Aluminium (EN AW 6063 T66)
<b>Sheet metal components</b>	Galvanised steel (DX51A+Z275)
<b>Small parts</b>	Stainless steel (V2A)
<b>Color</b>	Color aluminium: plate finish
<b>Warranty</b>	10 years



Flat Roof



South  
Orientation




Framed  
Module




Frameless  
Module



Orientation  
Landscape

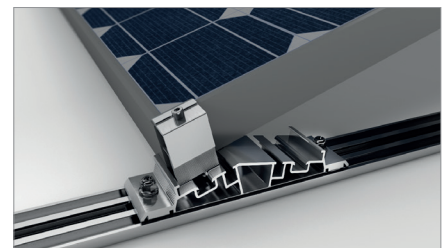

Detail front support

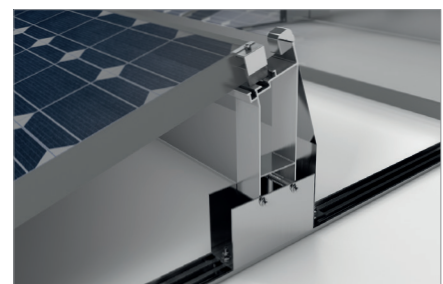

Detail back support

