




mounting
systems

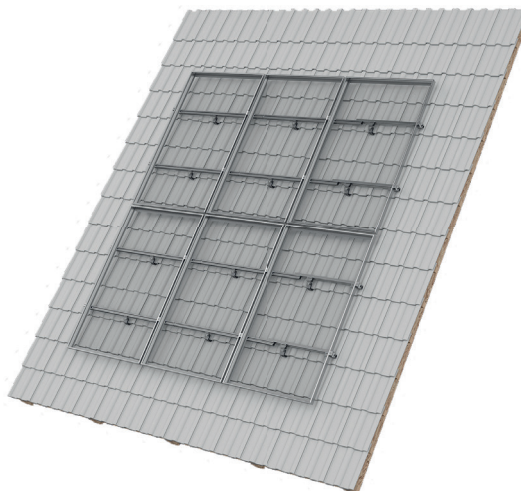

Pitched ProLine

Primjena	Na kosom krovu
Vrsta krovnog pokrova	Primjenjivo na većini krovnih pokrova
Nagib krova	Do 60°
Visina zgrade	Do 20m
Fotonaponski moduli	Uokvireni, bez okvira
Položaj modula	Okomiti, vodoravni
Razmak između mjesta pričvršćivanja na krovu	Standardno do 2 m (na zahtjev mogući veći razmak)
Nosivi profili	Ekstrudirani aluminij (EN AW 6063 T66)
Kuke, sitni elementi	Nehrđajući čelik (V2A), aluminij
Boja	Aluminij: završna obrada ploče; Vidljivi elementi su dostupni u crnoj boji
Certifikati	MCS 010, MCS 012 CE oznaka - EN 1090-2/3
Jamstvo	10 godina



Montaža
na krovu



Uokvireni
modul



Modul bez
okvira



Vodoravni
položaj



Trapezoidne
ploče



Dvostruki
rimski crijev



Crijev
škriljevac



Ravni crijev



Valoviti



Bitumenske
šindre



Stojeći spoj



Dvostruki rimski crijev



Stojeći spoj



Ravni crijev



Valoviti

