



mounting  
systems



## E-Port Vario S1 Industrial

Application	Ground-mount
Configuration	One segment offers space for two cars
Distance between supports	Standard: 5050 mm On request: +/-
Example calculation with a module size of +/- 1750 x 1134 mm	3 Segments = 6 Cars, 45 Module approx. 6207 x 15600 mm 7 Segments = 14 Cars, 100 Modules approx. 6207 x 36400 mm 10 Segments = 20 Cars, 150 Modules approx. 6207 x 53000 mm
Roof inclination	10°
Snow load	Standard: up to 2.58 kN/m <sup>2</sup> (North German lowlands excluded) On request: higher loads possible
Wind load	Standard: up to 0.85 kN/m <sup>2</sup> (North German lowlands excluded) On request: higher loads possible
Corrosion resistance	Standard: Class C3 On request: higher corrosion classes possible
Foundation	Soil expertise necessary (The soil expertise is the responsibility of the customer)
Color	Standard: Zinc, RAL 7016 On request: other RAL colors possible
Warranty	10 Years
Segments	



Ground-mount



Framed modules




Portrait orientation




Landscape orientation



Trapezoidal sheet

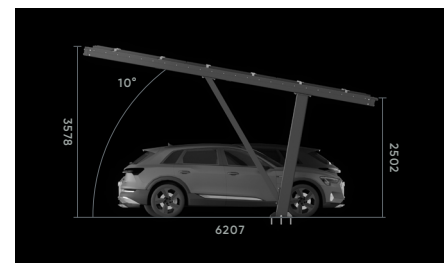

Side view

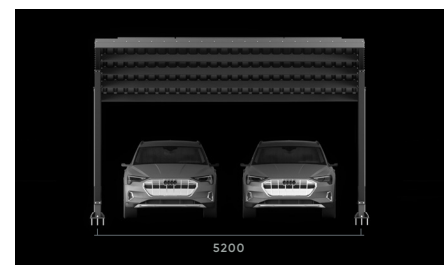

Front view



For further information: [www.mounting-systems.com](http://www.mounting-systems.com)  
Subject to technical changes.  
2025 © Mounting Systems GmbH